

Agema Open Networking Platform AG5648

Designed as the next generation TOR, the Agema AG5648 bare-metal switch provides high-density low latency 25GbE SFP28 connectivity to servers while providing 6x100GbE QSFP28 uplinks, all in a resilient 1RU package making it ideal for enterprise and data center Top of the Rack (ToR) deployment.

The AG5648 is configured with 48 x 25GbE SFP28 ports and 6 high bandwidth 100GE QSFP28 Uplinks. The device is pre-loaded with ONIE (Open Network Install Environment) ready to support the customers choice of modular extensible Network Operating Systems (NOS) benefiting users to achieve future proof SDN/NFV capable solutions, network scalability, flexibility and cost effectiveness. It delivers 1.8Tbps of switching fabric with ultra low sub-µsec latency, and also provides 1+1 resilient power in a very compact 1RU chassis.

Key Features


- 1RU high-density 48x25G + 6x100GE ToR.
- Up to 1.8Tbps of switching I/O bandwidth and available non-blocking wire-speed switching fabric.
- Support for open automated configuration and zero-touch provisioning capabilities simplify the management of network environments.

High Bandwidth

As bandwidth-intensive applications such as Web 2.0, virtualization, High Performance Computing (HPC) and Network Attached Storage (NAS) drive the transition to 25Gbps server connections within data centers and 100GbE Leaf/Spine interconnects, the AG5648 enables the transition to support this level of performance at the top of rack.

High Availability

The AG5648 has two slots for hot-swappable PSUs (Power Supply Units) and 4 fan trays. SFP28/QSFP28 Transceiver modules can be easily removed and replaced with no interruption to the network. These hot-swappable modules guarantee the continued delivery of essential services.

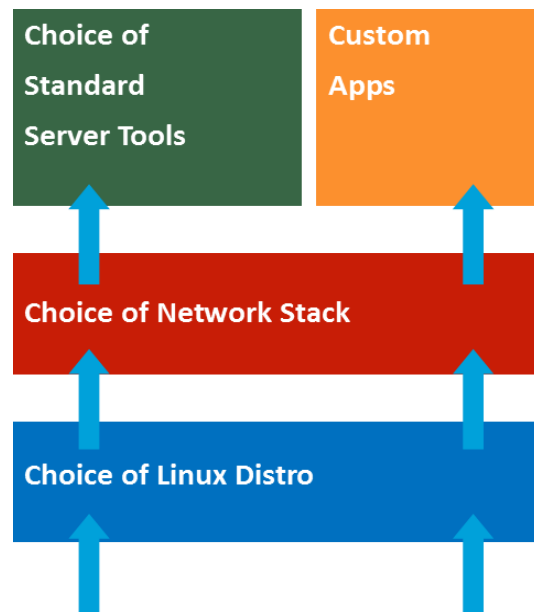

Agema Hardware Switch Platform



Technical Specification

Ordering Information	Physical	Regulatory Compliance	Performance
6 x 100GbE QSFP28 ports 48 x 25GbE SFP28 ports Single Serial RJ45 console Single USB 2.0 type-A port Single 10/100/1000M RJ45 OOB Management port 2 slots for PSUs 4 slots for fans Power Supplies & Fans 2 Hot-swappable AC power supply (shipped with single PSU) 4 Hot-swappable FAN tray Options: <ul style="list-style-type: none"> Bare Metal Only Fixed Configuration 	6 line-rate 100GbE QSFP28 48 line-rate 25GbE SFP28 1 USB-A type port 1 Serial RJ45 console ports 1 RJ45 OOB Management Port CPU: Intel Rangeley C2538 8GB SSD 4GB DDR3 16MB SPI-Flash Dimension (WxDxH): 438.5x460x43mm Weight: 7.99 kg Power supply: 100–240 VAC 50/60 Hz Power consumption: Typical 369 Watts; Max. 550 Watts *Compatible with 550W DC power supply Operating temperature: 0 to 40°C Operating relative humidity: 10 to 90% RH	Safety: EN 60950-1, UL/CSA 60950-1, IEC 60950-1, CCC Emissions: AS/NZS CISPR 22: Class A, ICES-003, Issue Class A, EN 55022: Class A, VCCI Class A, FCC CFR 47 Part 15, Subpart B Class A, CCC Immunity: EN 300 386, EN55024, EN 61000-3-2, EN 61000-3-3, EN 61000-4-2, EN 61000-4-3, EN 61000-4-5, EN 61000-4-6, EN61000-4-8, EN61000-4-11 EU RoHS Compliant	Integrated Packet Buffer Memory: 16 MB MAC Address: Max 136K Switch Fabric: 1.8Tbps (3.6 Tbps full duplex) IPv4 host table size: 8K min/72k max. IPv6 host table size: 4K min/36k max. L2 Multicast Table: 64K L3 multicast Groups: 32K Support Jumbo frames up to 12KB VLAN: 4K AG5648 Tomahawk AG5648V1 Tomahawk+

Software Specification

- ONIE Pre-installed
- Zero Touch Provisioning via DHCP



©2017. All Rights Reserved. Information in this document is subject to change without notice. Delta Electronics, Inc. assumes no responsibility for any errors that may appear in this document.

More product information, please visit www.agemasystems.com

To learn more about Delta, please visit www.deltaww.com