



Marvell® Prestera CX Data Center Switch


12.8 Tbps Ethernet Switch for Edge Data Centers and Composable Infrastructure

Overview

The Marvell® Prestera® 98CX8500 is a family of fully integrated ethernet switch ASICs. The 12.8Tbps CX8580 which includes 256 high speed 56G PAM4 SerDes enabling 32 400G Ethernet MAC interfaces. The latest Prestera CX family includes key technology blocks that offer enhanced performance for upcoming composable infrastructure and edge data center deployments.

The new Prestera CX devices include Storage Aware Flow Engine (SAFE) technology which enables visibility in to data center deployments that utilize HCI or composable infrastructure enabled by storage disaggregation platforms running NVMe-oF. SAFE enables telemetry at the RDMA flow level enabling operators to pin point aggressor hosts or congested disks and guarantee service levels and fairness amongst hosts and storage resources across the network.

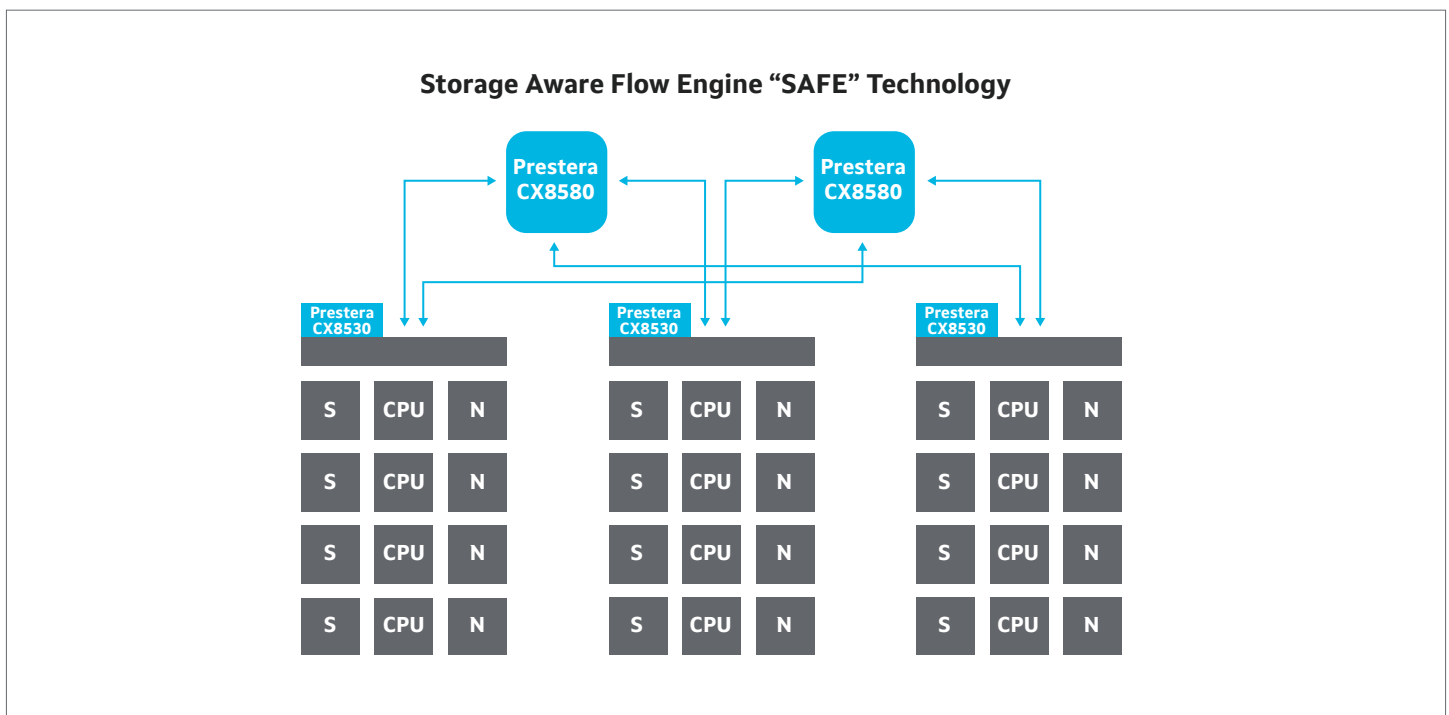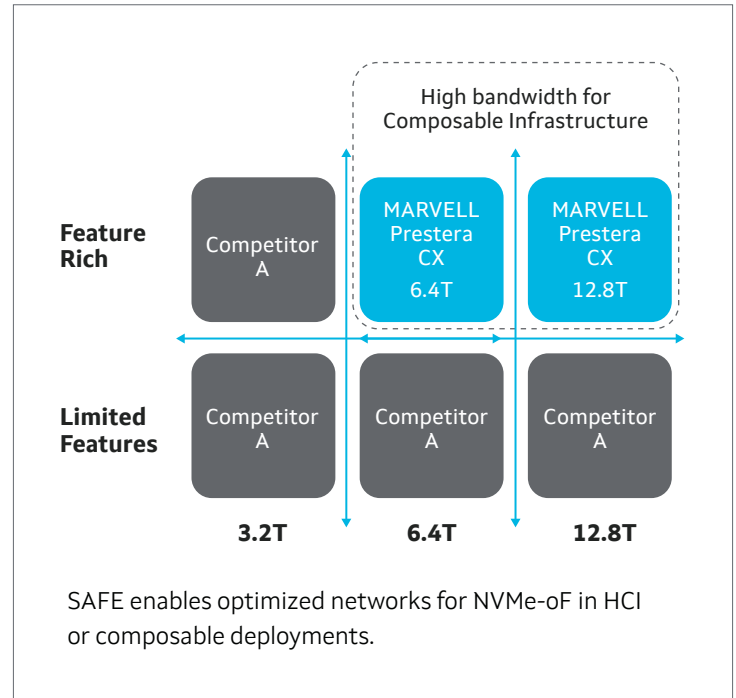


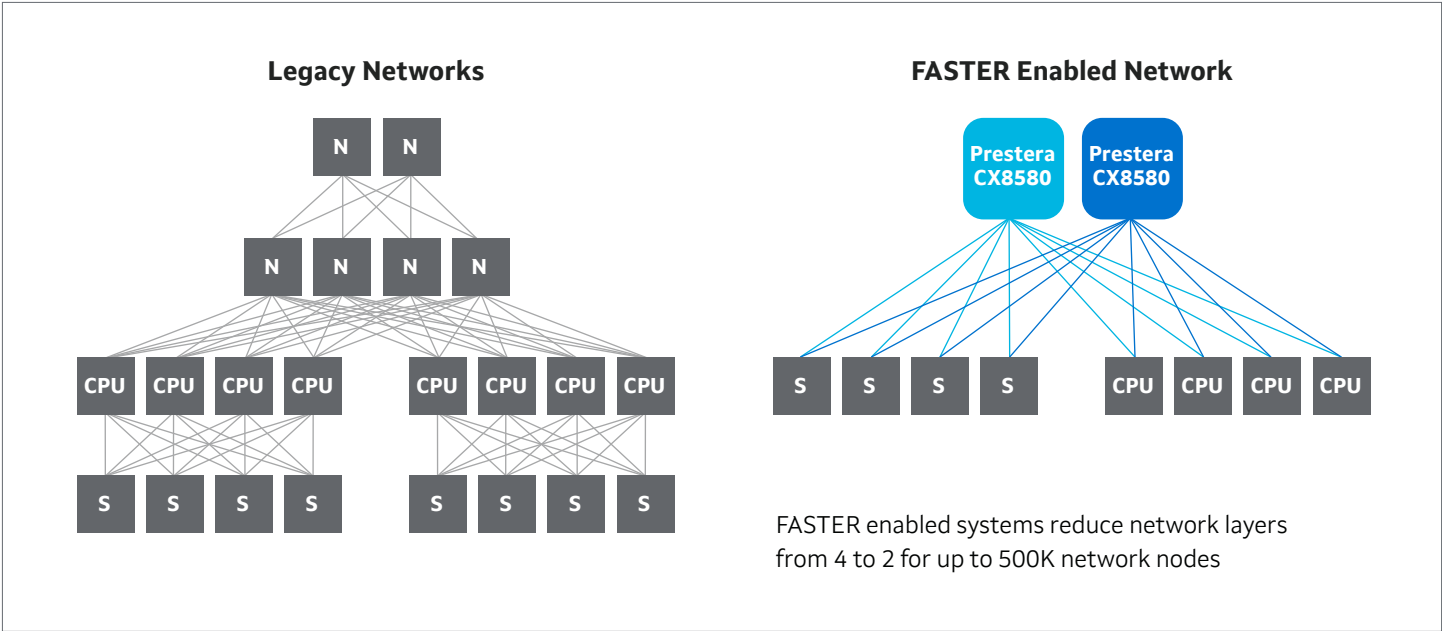

The Prestera CX device also includes Forwarding Architecture using Slices of Terabit Ethernet Routers (FASTER) technology that enables high radix systems to be built with end-to-end QoS at latency, power and cost at greater than 30% savings over standard ethernet CLOS architectures. FASTER enables reduction of network layers for scale out deployments through its 1,000 port radix capability. The result is a solution with high port radix enabling a reduction of network layers translating to lower CO with a huge savings in network equipment, wiring and optics.

Combining the SAFE and FASTER technology, the newest Prestera CX family provides the ideal solution for the roll out of edge data center deployments where composable infrastructure provides the flexibility for adapting to the wide range of applications being deployed at the edge based on the 5G and IOT build out. With the edge data center network being collapsed into a single layer and the enhanced visibility of the storage flows in the network, the Prestera CX enables the most efficient edge data center design with the highest performance, lowest latency and best ROI for the equipment deployed in these locations.

Block Diagram

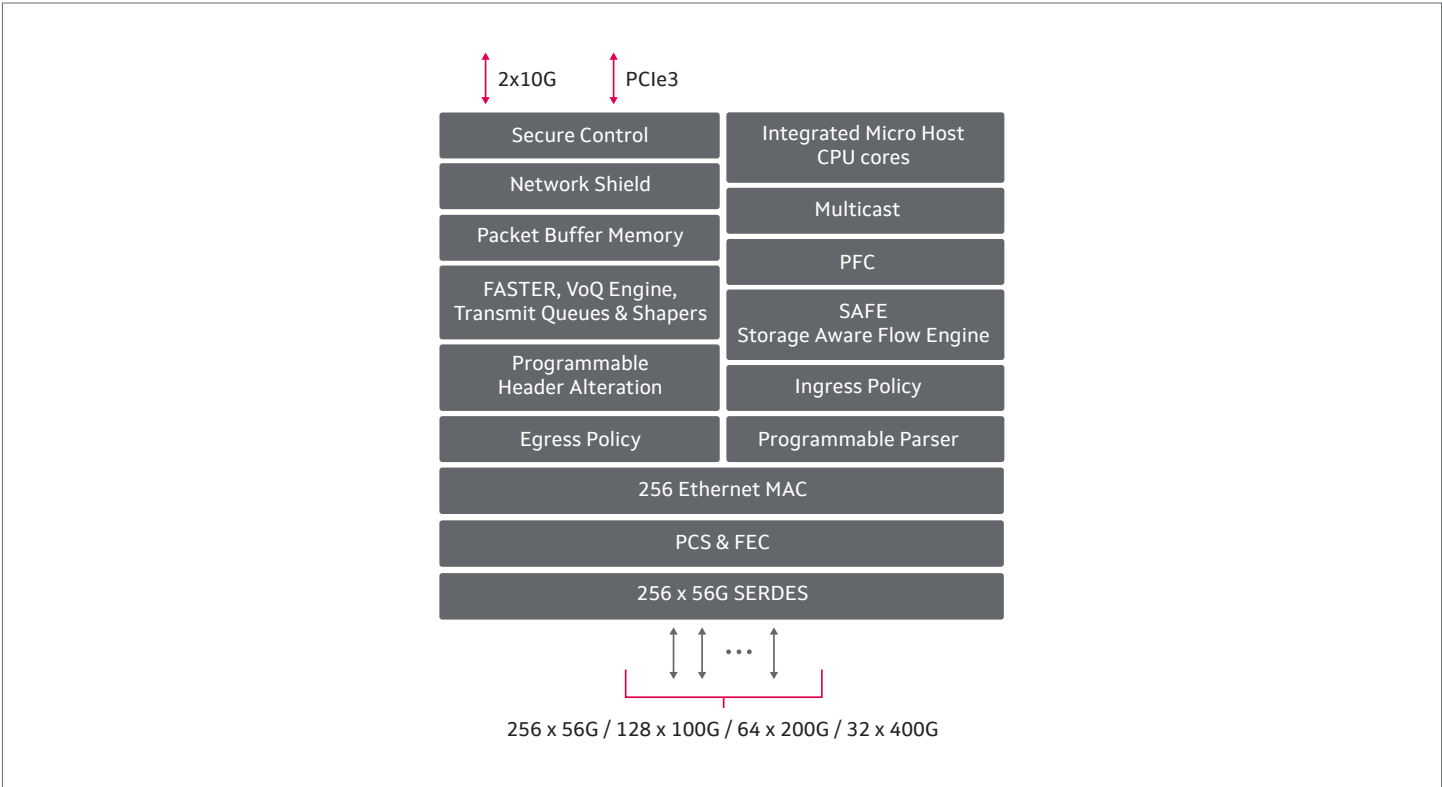

Key Features

Features	Benefits
Packet Processor	<ul style="list-style-type: none"> 9th generation ethernet switch pipeline deployed in enterprise, service provider and data center networks Leveraging stable 16nm high volume process node enabling quick TTM for customers
High Speed I/O	<ul style="list-style-type: none"> 256 of the leading edge 56G PAM4 LR SerDes supporting DAC or optical interconnects Fully compliant ethernet MAC interfaces to the latest IEEE standard for 1G through 400G rates
Traffic Management	<ul style="list-style-type: none"> 8K queues with 3 level H-QoS and VoQ support for 1K ports Support for elephant flow detection and packet prioritization using advanced proactive hardware probes that can predict congestion before the event occurs
Forwarding Resources	<ul style="list-style-type: none"> Large shared pool of memory dynamically allocated between forwarding engines with >2x capacity of currently available solutions Support for up to 16K ECMP path scale with congestion aware load balancing or DLB with hardware to prevent OoO within a flow
Buffer Resources	<ul style="list-style-type: none"> Global Shared packet buffer with dynamic buffer absorption and enhanced micro-burst support Fine grain buffer segmentation provides 2x packet capacity over available solutions in the market
Flow Awareness	<ul style="list-style-type: none"> Multi-lookup flow engine capable of using both TCAM and SRAM for lookups on more than 500Kflows RoCEv2 awareness provides flow level diagnostics to identify and resolve network congestion

Target Applications

- Spine and leaf data center switches
- Modular data center switch with centralized or distributed architecture using VoQs
- Embedded switch designs in blade servers and ethernet storage arrays
- Interconnect for high performance security and network monitoring systems
- Enterprise network modular and fixed core solutions

Part Number Matrix

Part Number	Bandwidth	I/O Configuration
98CX8580	12.8Tbps	256 x 56G I/O
98CX8550	8Tbps	160 x 56G I/O
98CX8542	6.4Tbps	256 x 28G I/O
98CX8540	6.4Tbps	128 x 56G I/O
98CX8530	4Tbps	80 x 56G I/O
98CX8522	3.2Tbps	128 x 28G I/O
98CX8520	3.2Tbps	64 x 56G I/O



Marvell first revolutionized the digital storage industry by moving information at speeds never thought possible. Today, that same breakthrough innovation remains at the heart of the company's storage, networking and connectivity solutions. With leading intellectual property and deep system-level knowledge, Marvell semiconductor solutions continue to transform the enterprise, cloud, automotive, industrial, and consumer markets. For more information, visit www.marvell.com.

© 2020 Marvell. All rights reserved. The MARVELL mark and M logo are registered and/or common law trademarks of Marvell and/or its Affiliates in the US and/or other countries. This document may also contain other registered or common law trademarks of Marvell and/or its Affiliates.