


Overview

HPE Altoline 6921 Switch Series

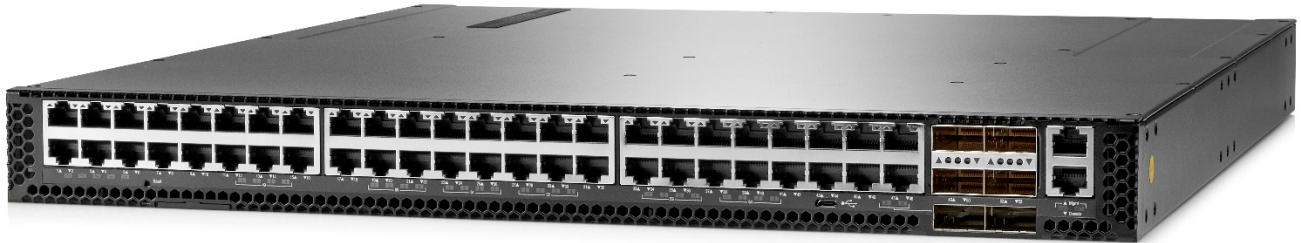

Models

HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL317A
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL318A
HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL315A
HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL316A

Key features

- High 10GbE port density and low latency for demanding applications
- Choice of network operating systems, including Cumulus Networks Linux NOS, and Pica8 NOS
- OCP-certified, Open-networking and disaggregated solution for customer choice
- VXLAN L2 and L3 for efficient network virtualization overlay solutions
- Support for Big Switch Network's Big Cloud Fabric and Big Monitoring Fabric solutions

Product overview

The HPE Altoline 6921 Switch Series are top-of-rack (TOR) or spine switches for high-performance data centers. In a compact 1RU form factor, these switches provides line-rate L2 and L3 switching across up to 48 1/10GBASE-T or 1/10 GbE SFP+ ports, with 6 x 40GbE QSFP+ uplink connections.

The HPE Altoline 6921 Switch Series can be deployed as a TOR switch supporting 10GbE server connections, or as a spine switch, supporting 10GbE interconnects.

The HPE Altoline 6921 Switch Series a bare-metal switches loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible independent switch OS offerings.

Features and benefits

Data center optimized

- **Flexible high port density**
the HPE Altoline 6921 Switch Series enables scaling of the server edge with 10GbE copper or fiber server connection, with 40GbE uplinks, to new heights with high density delivered in a 1RU design.

Configuration

- **High-performance switching**
cut-through and nonblocking architecture delivers low latency (600 - 720 nanosecond for 40GbE) for very demanding enterprise applications; the switch delivers high-performance switching capacity and wire-speed packet forwarding
- **Hot/cold aisle support**
Models available with front-to-back (port-to-power) or back-to-front (power-to-port) airflow
- **Redundant fans and power supplies**
1+1 internal redundant and hot-pluggable power supplies and N+1 redundant fan trays enhance reliability and availability
- **VXLAN hardware support**
supports VXLAN L2 & L3 VTEP overlay technologies

Manageability

- **Out-of-band interface**
isolates management traffic from user data plane traffic for complete isolation and total reachability, no matter what happens in the data plane
- **ONIE bootloader**
switch is loaded with Open Network Install Environment (ONIE) software installer
- **Intel x86 CPU**
Provides high performance support of widely available, industry standard software and utilities

Layer 2 switching

- **VLAN support**
provides support for 4,096 VLAN IDs

Additional information

- **Low power consumption**
typical operation uses just 267W of AC power

Warranty and support

- **1-year Warranty**
see <http://www.hpe.com/networking/warrantysummary> for warranty and support information included with your product purchase.
- **Software releases**
to find software for your product, refer to <http://www.hpe.com/networking/support> ; for details on the software releases available with your product purchase, refer to <http://www.hpe.com/networking/warrantysummary>

Configuration

Build To Order:

BTO is a standalone unit with no integration. BTO products ship standalone are not part of a CTO or Rack-Shippable solution.

Router Chassis

HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Front-to-Back Switch

- 48 1/10BaseT GbE ports (min=0 \ max=48)
- 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers)

Each Switch:

- 2 Power Supplies Standard (min=2 \ max=2)
- 5 Front to Back Fan Trays Standard (min=5 \ max=5)
- 1U - Height

JL315A
See Configuration
NOTE: 1

PDU Cable NA/MEX/TW/JP

- C13 PDU Jumper Cord (NA/MEX/TW/JP)

JL315A#B2B

PDU Cable ROW

- C13 PDU Jumper Cord (ROW)

JL315A #B2C

High Volt Switch to Wall Power Cord

- HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A)

JL315A#B2E

No Power Cord

- No Localized Power Cord Selected

JL315A#AC3

HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Back-to-Front Switch

- 48 1/10BaseT GbE ports (min=0 \ max=48)
- 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers)

Each Switch:

- 2 Power Supplies Standard (min=2 \ max=2)
- 5 Back to Front Fan Trays Standard (min=5 \ max=5)
- 1U - Height

JL316A
See Configuration
NOTE: 1

PDU Cable NA/MEX/TW/JP

- C13 PDU Jumper Cord (NA/MEX/TW/JP)

JL316A#B2B

PDU Cable ROW

- C13 PDU Jumper Cord (ROW)

JL316A#B2C

High Volt Switch to Wall Power Cord

- HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A)

JL316A#B2E

No Power Cord

- No Localized Power Cord Selected

JL316A#AC3

Configuration

HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL317A
<ul style="list-style-type: none"> 48 SFP/SFP+ 1/10GbE ports (min=0 \ max=48 SFP/SFP+ Transceivers) 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	See Configuration NOTE: 1
Each Switch:	
<ul style="list-style-type: none"> 2 Power Supplies Standard (min=2 \ max=2) 5 Front to Back Fan Trays Standard (min=5 \ max=5) 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL317A#B2B
<ul style="list-style-type: none"> C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL317A#B2C
<ul style="list-style-type: none"> C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL317A#B2E
<ul style="list-style-type: none"> HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL317A#AC3
<ul style="list-style-type: none"> No Localized Power Cord Selected 	
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL318A
<ul style="list-style-type: none"> 48 SFP/SFP+ 1/10GbE ports (min=0 \ max=48 SFP/SFP+ Transceivers) 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	See Configuration NOTE: 1
Each Switch:	
<ul style="list-style-type: none"> 2 Power Supplies Standard (min=2 \ max=2) 5 Back to Front Fan Trays Standard (min=5 \ max=5) 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL318A #B2B
<ul style="list-style-type: none"> C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL318A#B2C
<ul style="list-style-type: none"> C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL318A#B2E
<ul style="list-style-type: none"> HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL317A#AC3
<ul style="list-style-type: none"> No Localized Power Cord Selected 	

Configuration Rules:

Note 1 Localization (Wall Power Cord) required on orders without #B2B, #B2C (PDU Power Cord) or #B2E. (See Localization Menu)

Rack Level Integration CTO Models

Configuration

CTO Switch Chassis

HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL315A See Configuration NOTE: 1
<ul style="list-style-type: none"> • 48 1/10BaseT GbE ports (min=0 \ max=48) • 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	
Each Switch:	
<ul style="list-style-type: none"> • 2 Power Supplies Standard (min=2 \ max=2) • 5 Front to Back Fan Trays Standard (min=5 \ max=5) • 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL315A#B2B
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL315A #B2C
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL315A#B2E
<ul style="list-style-type: none"> • HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL315A#AC3
<ul style="list-style-type: none"> • No Localized Power Cord Selected 	
HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL316A See Configuration NOTE: 1
<ul style="list-style-type: none"> • 48 1/10BaseT GbE ports (min=0 \ max=48) • 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	
Each Switch:	
<ul style="list-style-type: none"> • 2 Power Supplies Standard (min=2 \ max=2) • 5 Back to Front Fan Trays Standard (min=5 \ max=5) • 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL316A#B2B
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL316A#B2C
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL316A#B2E
<ul style="list-style-type: none"> • HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL316A#AC3
<ul style="list-style-type: none"> • No Localized Power Cord Selected 	
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL317A See Configuration NOTE: 1
<ul style="list-style-type: none"> • 48 SFP/SFP+ 1/10GbE ports (min=0 \ max=48 SFP/SFP+ Transceivers) • 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	
Each Switch:	

Configuration

<ul style="list-style-type: none"> • 2 Power Supplies Standard (min=2 \ max=2) • 5 Front to Back Fan Trays Standard (min=5 \ max=5) • 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL317A#B2B
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL317A#B2C
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL317A#B2E
<ul style="list-style-type: none"> • HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL317A#AC3
<ul style="list-style-type: none"> • No Localized Power Cord Selected 	
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL318A
<ul style="list-style-type: none"> • 48 SFP/SFP+ 1/10GbE ports (min=0 \ max=48 SFP/SFP+ Transceivers) • 6 QSFP+ 40GbE ports (min=0 \ max=6 QSFP+ Transceivers) 	See Configuration
	NOTE: 1
Each Switch:	
<ul style="list-style-type: none"> • 2 Power Supplies Standard (min=2 \ max=2) • 5 Back to Front Fan Trays Standard (min=5 \ max=5) • 1U - Height 	
PDU Cable NA/MEX/TW/JP	JL318A #B2B
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (NA/MEX/TW/JP) 	
PDU Cable ROW	JL318A#B2C
<ul style="list-style-type: none"> • C13 PDU Jumper Cord (ROW) 	
High Volt Switch to Wall Power Cord	JL318A#B2E
<ul style="list-style-type: none"> • HPE 2.3M C13 to NEMA L6-20P Power Cord(J9936A) 	
No Power Cord	JL318A#AC3
<ul style="list-style-type: none"> • No Localized Power Cord Selected 	

Configuration Rules:

Note 1 Localization (Wall Power Cord) required on orders without #B2B, #B2C (PDU Power Cord) or #B2E. (See Localization Menu)

Transceivers

SFP Transceivers

HPE X120 1G SFP RJ45 T Transceiver	JD089B
HPE X120 1G SFP LC SX Transceiver	JD118B
HPE X120 1G SFP LC LX Transceiver	JD119B

Configuration

HPE X120 1G SFP LC LH40 1550nm Transceiver JD062A

SFP+ Transceivers

HPE X130 10G SFP+ LC SR Transceiver JD092B
 HPE X130 10G SFP+ LC LR Transceiver JD094B
 HPE X130 10G SFP+ LC SR Data Center Transceiver JL437A
 HPE X130 10G SFP+ LC LR Data Center Transceiver JL439A
 HPE X130 10G SFP+ LC LH 80km Transceiver JG915A

QSFP+ Transceivers

HPE X140 40G QSFP+ LC LR4 SM 10km 1310nm Transceiver JG661A
 HPE X140 40G QSFP+ MPO SR4 Transceiver JG325B
 HPE X140 40G QSFP+ MPO MM 850nm CSR4 300m Transceiver JG709A
 HPE X140 40G QSFP+ LC BiDi 100m MM Transceiver JL251A
 HPE X140 40G QSFP+ LC LR4L 2km SM Transceiver JL286A

QSFP28 Transceivers

HPE X150 100G QSFP28 MPO SR4 100m MM Transceiver JL274A
 HPE X150 100G QSFP28 LC LR4 10km SM Transceiver JL275A

Cables

HPE FlexNetwork X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable JD095C
 HPE FlexNetwork X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable JD096C
 HPE FlexNetwork X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable JD097C
 HPE FlexNetwork X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable JG081C
 HPE FlexNetwork X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable JC784C
 HPE FlexNetwork X240 40G QSFP+ QSFP+ 1m Direct Attach Copper Cable JG326A
 HPE FlexNetwork X240 40G QSFP+ QSFP+ 3m Direct Attach Copper Cable JG327A
 HPE FlexNetwork X240 40G QSFP+ QSFP+ 5m Direct Attach Copper Cable JG328A
 HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 1m Direct Attach Copper Splitter Cable JG329A
 HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 3m Direct Attach Copper Splitter Cable JG330A
 HPE FlexNetwork X240 40G QSFP+ to 4x10G SFP+ 5m Direct Attach Copper Splitter Cable JG331A
 HPE X2A0 40G QSFP+ to QSFP+ 7m Active Optical Cable JL287A
 HPE X2A0 40G QSFP+ to QSFP+ 10m Active Optical Cable JL288A
 HPE X2A0 40G QSFP+ to QSFP+ 20m Active Optical Cable JL289A
 HPE X240 100G QSFP28 to QSFP28 1m Direct Attach Copper Cable JL271A
 HPE X240 100G QSFP28 to QSFP28 3m Direct Attach Copper Cable JL272A
 HPE X240 100G QSFP28 to QSFP28 5m Direct Attach Copper Cable JL273A
 HPE X2A0 100G QSFP28 to QSFP28 7m Active Optical Cable JL276A
 HPE X2A0 100G QSFP28 to QSFP28 10m Active Optical Cable JL277A
 HPE X2A0 100G QSFP28 to QSFP28 20m Active Optical Cable JL278A
 HPE X240 QSFP28 4xSFP28 1m Direct Attach Copper Cable JL282A
 HPE X240 QSFP28 4xSFP28 3m Direct Attach Copper Cable JL283A

Switch Enclosure Options

Configuration

Rack Mount Kit

System (std 0 // max 1) User Selection (min 0 // max 1)

HPE Altoline Gen2 Rackmount Kit

JL198A
See Configuration
NOTE: 1, 3

Configuration Rules:

Note 1

This rack mount kit is only supported on the following switches:


HPE Altoline 6920 48XG 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL167A
HPE Altoline 6920 48XG 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL168A
HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL315A
HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL316A
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Front-to-Back Switch	JL317A
HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Back-to-Front Switch	JL318A
HPE Altoline 6940 32QSFP+ x86 ONIE AC Front-to-Back Switch	JL165A
HPE Altoline 6940 32QSFP+ x86 ONIE AC Back-to-Front Switch	JL166A
HPE Altoline 6941 32QSFP+ x86 ONIE AC Front-to-Back Switch	JL313A
HPE Altoline 6941 32QSFP+ x86 ONIE AC Back-to-Front Switch	JL314A
HPE Altoline 6960 32QSFP28 x86 ONIE AC Front-to-Back Switch	JL279A
HPE Altoline 6960 32QSFP28 x86 ONIE AC Back-to-Front Switch	JL280A

Note 3

If a switch ordered and factory racked, then this rackmount must be #0D1

Technical Specifications

HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Front-to-Back Switch (JL317A)

I/O ports and slots	48 SFP+ 1/10GbE ports (IEEE 802.3ae Type 10GBASE-ER, IEEE 802.3ae Type 10GBASE-LR, IEEE 802.3ae Type 10GBASE-SR, IEEE 802.3z Type 1000BASE-SX, IEEE 802.3z Type 1000BASE-LX) 6 QSFP+ 40GbE ports	
Additional ports and slots	1 RJ-45 serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	
Power supplies	2 power supply slots 1 minimum power supply required includes: 2 x PSUs 	
Fan tray	5 fan tray slots Switch comes with five (5) fan trays (front-to-back airflow)	
Physical characteristics	Dimensions	17.4(w) x 18.6(d) x 1.71(h) in (44.2 x 47.24 x 4.34 cm)
	Weight	18.74 lb (8.5 kg)
Memory and processor	Intel Atom C2538 quad-core x86 processor @ 2.4 GHz, 8 GB DDR3 SDRAM; Packet buffer size: 12 MB, 8 GB NAND flash	
Performance	40 Gbps Latency	> .6 μ s
	Throughput	up to 1 Bpps
	Routing/Switching capacity	1440 Gbps
	Routing table size	64000 entries (IPv4), 20000 entries (IPv6)
	MAC address table size	320000 entries
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Airflow direction	Front-to-back
Electrical characteristics	Frequency	50/60 Hz
	Voltage	90 - 264 VAC, rated
	Maximum power rating	282 W
	Idle power	267 W
	Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PSU Efficiency: Up to 93% for AC PSUs
Safety	cUL Certified; EN 60950; EN 55022 Class A; VCCI Class A; ROHS Compliance; FCC Class A: Regulations for Radio Frequency Devices for Electromagnetic Compliance; UL	
Emissions	FCC part 15 Class A; EN 55022 Class A; VCCI; EN 60950-1	
Immunity	ESD	EN 60950
	EFT/Burst	IEC 68-2-14

Technical Specifications

Management	Command-line interface; Out-of-band management; SNMP manager; Telnet; FTP
Services	Refer to the Hewlett Packard Enterprise website at http://www.hpe.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

HPE Altoline 6921 48SFP+ 6QSFP+ x86 ONIE AC Back-to-Front Switch (JL318A)

I/O ports and slots	48 SFP+ 1/10GbE ports (IEEE 802.3ae Type 10GBASE-ER, IEEE 802.3ae Type 10GBASE-LR, IEEE 802.3ae Type 10GBASE-SR, IEEE 802.3z Type 1000BASE-SX, IEEE 802.3z Type 1000BASE-LX) 6 QSFP+ 40GbE ports	
Additional ports and slots	1 RJ-45 serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	
Power supplies	2 power supply slots 1 minimum power supply required includes: 2 x PSUs ()	
Fan tray	5 fan tray slots Switch comes with five (5) fan trays (back-to-front airflow)	
Physical characteristics	Dimensions	17.4(w) x 18.6(d) x 1.71(h) in (44.2 x 47.24 x 4.34 cm)
	Weight	18.74 lb (8.5 kg)
Memory and processor	Intel Atom C2538 quad-core x86 processor @ 2.4 GHz, 8 GB DDR3 SDRAM; Packet buffer size: 12 MB, 8 GB NAND flash	
Performance	40 Gbps Latency	> .6 μ s
	Throughput	up to 1 Bpps
	Routing/Switching capacity	1440 Gbps
	Routing table size	64000 entries (IPv4), 20000 entries (IPv6)
	MAC address table size	320000 entries
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Airflow direction	Back-to-front
Electrical characteristics	Frequency	50/60 Hz
	Voltage	90 - 264 VAC, rated
	Maximum power rating	282 W
	Idle power	267 W
	Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PSU Efficiency: Up to 93% for AC PSUs
Safety	cUL Certified; EN 60950; EN 55022 Class A; VCCI Class A; ROHS Compliance; FCC Class A: Regulations for Radio Frequency Devices for Electromagnetic Compliance; UL	
Emissions	FCC part 15 Class A; EN 55022 Class A; VCCI; EN 60950-1	

Technical Specifications

Immunity	ESD	EN 60950
	EFT/Burst	IEC 68-2-14
Management	Command-line interface; Out-of-band management; SNMP manager; Telnet; FTP	
Services	Refer to the Hewlett Packard Enterprise website at http://www.hpe.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.	

HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Front-to-Back Switch (JL315A)

I/O ports and slots	48 1/10GBASE-T ports 6 QSFP+ 40GbE ports	
Additional ports and slots	1 RJ-45 serial console port 1 RJ-45 out-of-band management port 1 USB 2.0	
Power supplies	2 power supply slots 1 minimum power supply required includes: 2 x PSUs ()	
Fan tray	5 fan tray slots Switch comes with five (5) fan trays (front-to-back airflow)	
Physical characteristics	Dimensions	17.4(w) x 18.6(d) x 1.71(h) in (44.2 x 47.24 x 4.34 cm)
	Weight	18.74 lb (8.5 kg)
Memory and processor	Intel Atom C2538 quad-core x86 processor @ 2.4 GHz, 8 GB DDR3 SDRAM; Packet buffer size: 12 MB, 8 GB NAND flash	
Performance	40 Gbps Latency	> .6 μ s
	Throughput	up to 1 Bpps
	Routing/Switching capacity	1440 Gbps
	Routing table size	64000 entries (IPv4), 20000 entries (IPv6)
	MAC address table size	320000 entries
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
	Airflow direction	Front-to-back
Electrical characteristics	Frequency	50/60 Hz
	Voltage	90 - 264 VAC, rated
	Maximum power rating	282 W
	Idle power	267 W
	Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PSU Efficiency: Up to 93% for AC PSUs
Safety	cUL Certified; EN 60950; EN 55022 Class A; VCCI Class A; ROHS Compliance; FCC Class A: Regulations for Radio Frequency Devices for Electromagnetic Compliance; UL	

Technical Specifications

Emissions	FCC part 15 Class A; EN 55022 Class A; VCCI; EN 60950-1	
Immunity	ESD	EN 60950
	EFT/Burst	IEC 68-2-14
Management	Command-line interface; Out-of-band management; SNMP manager; Telnet; FTP	
Services	Refer to the Hewlett Packard Enterprise website at http://www.hpe.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.	

HPE Altoline 6921 48XGT 6QSFP+ x86 ONIE AC Back-to-Front Switch (JL316A)

I/O ports and slots	48 1/10GBASE-T ports	
	6 QSFP+ 40GbE ports	
Additional ports and slots	1 RJ-45 serial console port	
	1 RJ-45 out-of-band management port	
	1 USB 2.0	
Power supplies	2 power supply slots	
	1 minimum power supply required includes: 2 x PSUs O	
Fan tray	5 fan tray slots	
	Switch comes with five (5) fan trays (back-to-front airflow)	
Physical characteristics	Dimensions	17.4(w) x 18.6(d) x 1.71(h) in (44.2 x 47.24 x 4.34 cm)
	Weight	18.74 lb (8.5 kg)
Memory and processor	Intel Atom C2538 quad-core x86 processor @ 2.4 GHz, 8 GB DDR3 SDRAM; Packet buffer size: 12 MB, 8 GB NAND flash	
Performance	40 Gbps Latency	> .6 μ s
	Throughput	up to 1 Bpps
	Routing/Switching capacity	1440 Gbps
	Routing table size	64000 entries (IPv4), 20000 entries (IPv6)
	MAC address table size	320000 entries
Environment	Operating temperature	32°F to 104°F (0°C to 40°C)
	Operating relative humidity	5% to 95%, noncondensing
	Nonoperating/Storage temperature	-40°F to 158°F (-40°C to 70°C)
Electrical characteristics	Airflow direction	Back-to-front
	Frequency	50/60 Hz
	Voltage	90 - 264 VAC, rated
	Maximum power rating	282 W
	Idle power	267 W
Notes	Idle power is the actual power consumption of the device with no ports connected. Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PSU Efficiency: Up to 93% for AC PSUs	

Technical Specifications

Safety	cUL Certified; EN 60950; EN 55022 Class A; VCCI Class A; ROHS Compliance; FCC Class A: Regulations for Radio Frequency Devices for Electromagnetic Compliance; UL
Emissions	FCC part 15 Class A; EN 55022 Class A; VCCI; EN 60950-1
Immunity	ESD EN 60950 EFT/Burst IEC 68-2-14
Management	Command-line interface; Out-of-band management; SNMP manager; Telnet; FTP
Services	Refer to the Hewlett Packard Enterprise website at http://www.hpe.com/networking/services for details on the service-level descriptions and product numbers. For details about services and response times in your area, please contact your local Hewlett Packard Enterprise sales office.

Summary of Changes

Date	Version History	Action	Description of Change:
05-Mar-2018	Version 4	Changed	Key features updated
05-Feb-2018	Version 3	Changed	Configuration section updated
18-Apr-2017	Version 2	Added	Transceivers added on the Configuration section: JL437A, JL439A
05-Sept-2016	Version 1	Creation	Document creation



Sign up for updates



© Copyright 2018 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

To learn more, visit: <http://www.hpe.com/networking>

c05158727 - 15633 - Worldwide - V4 - 05- March-2018