

Ex. Integer Queue

typedef A, B;


↑
existing
type

↑
alias for A

Queue empty state

client view: ()

inside view:

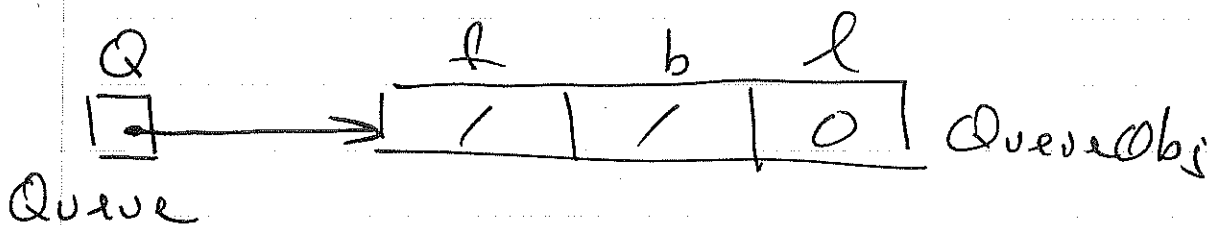

non-empty state

client: (3, 1, 2)

inside:

