

CSE 101-01 5-9-23

11

-
- Pas: ext. 2 days

Handout on ADTs in C++.

& operator in C++


- bitwise and (C/C++)
- address-of (C/C++)
- reference operator (C++ only)
operator on a type on its left.

typed

giving corresponding reference type.

A reference variable is an alias for another variable

Ex.

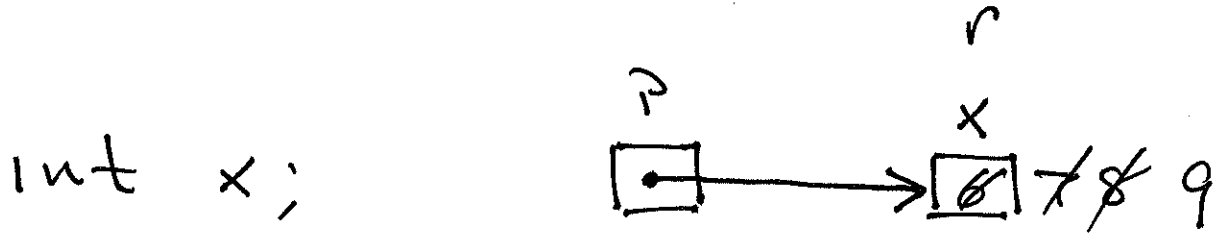

```
int * P = &x;
```

↑ address-of

```
int &r = x;
```

↑ reference

```
x = x;
x++;
(*P)++;
r++;
```